





SOURCING MADE SIMPLE

1
VENDOR

1
SHIPMENT

1
INVOICE

TOTAL SAVINGS
& CONVENIENCE

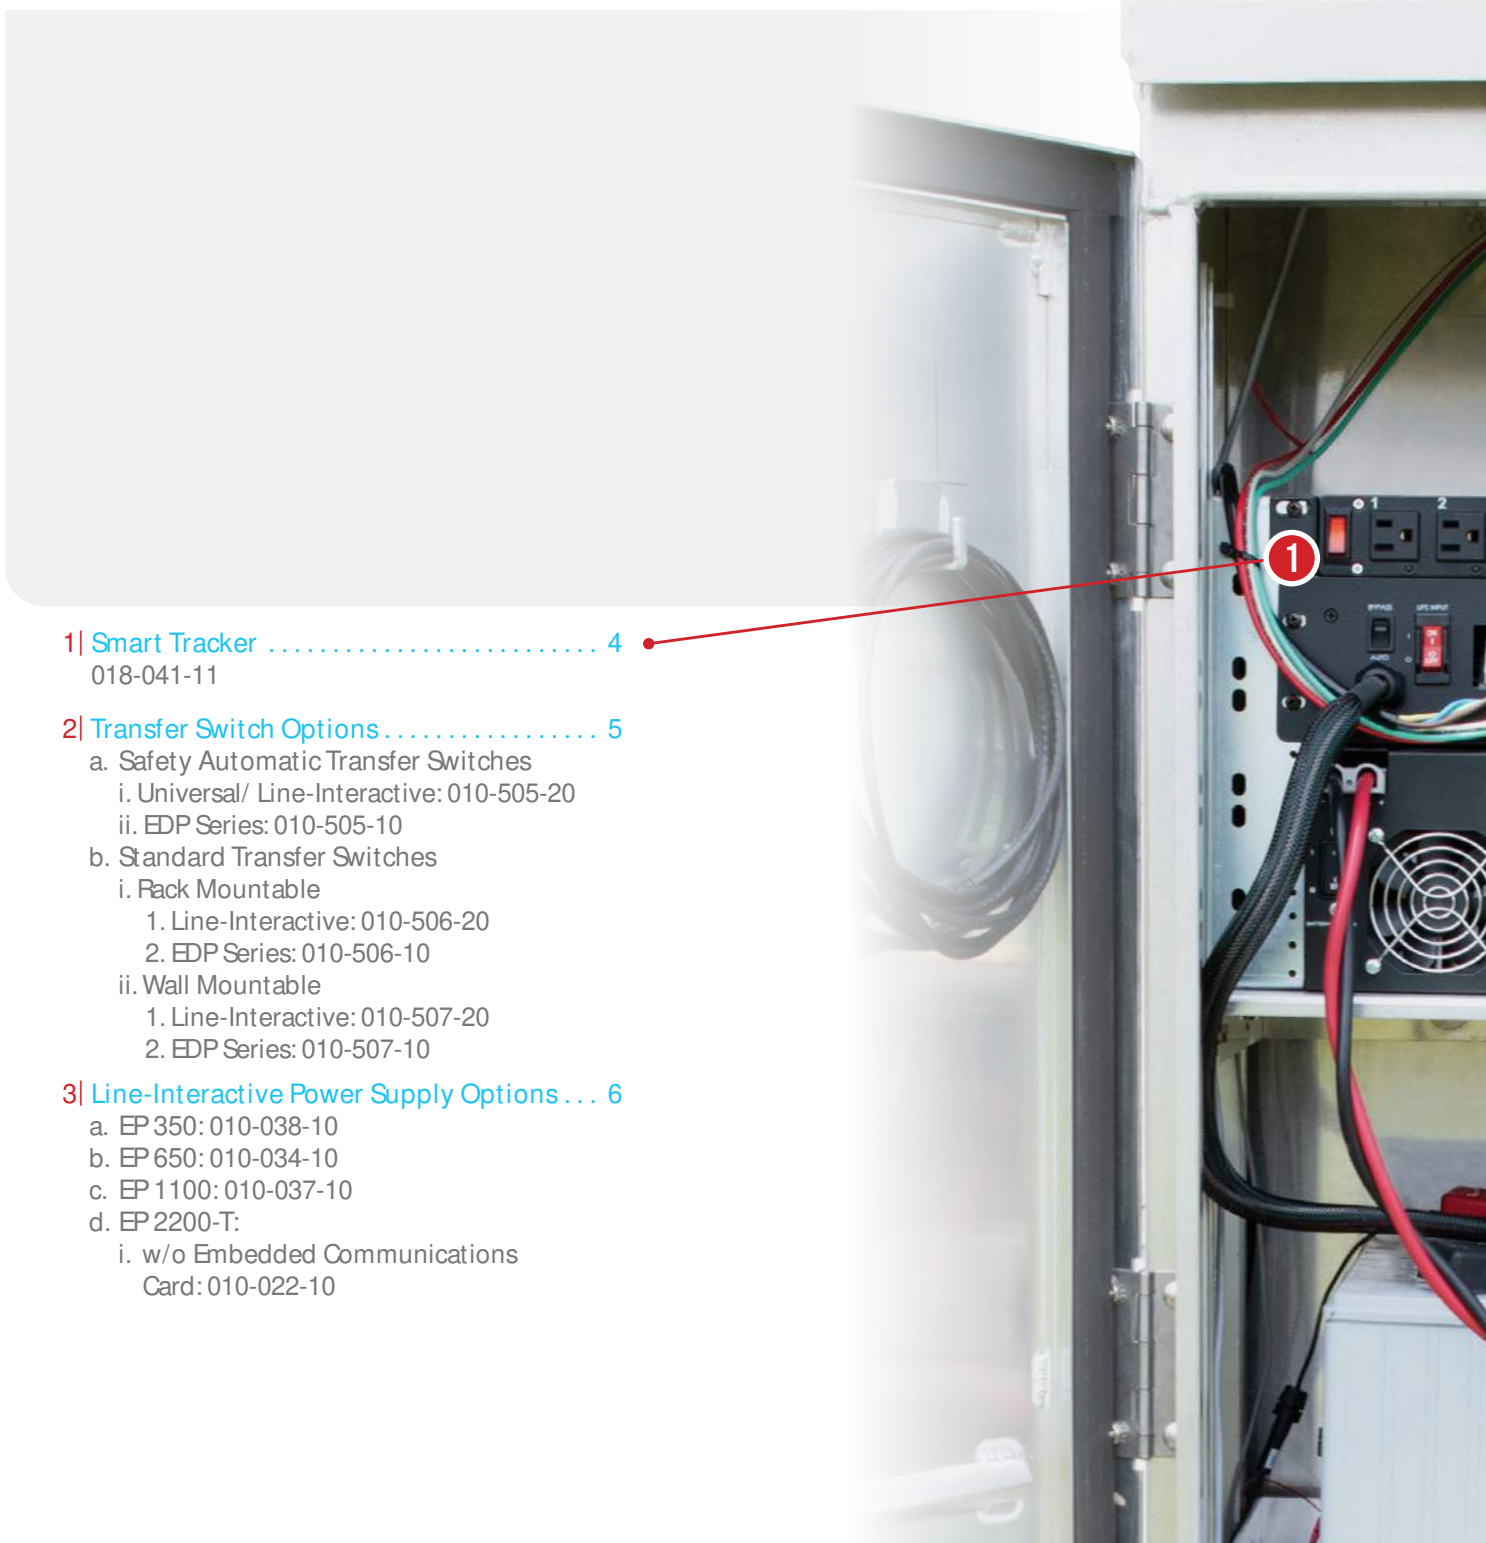

- 1| **Smart Tracker** 4
018-041-11
- 2| **Transfer Switch Options**..... 5
 - a. Safety Automatic Transfer Switches
 - i. Universal/ Line-Interactive: 010-505-20
 - ii. EDP Series: 010-505-10
 - b. Standard Transfer Switches
 - i. Rack Mountable
 - 1. Line-Interactive: 010-506-20
 - 2. EDP Series: 010-506-10
 - ii. Wall Mountable
 - 1. Line-Interactive: 010-507-20
 - 2. EDP Series: 010-507-10
- 3| **Line-Interactive Power Supply Options**... 6
 - a. EP 350: 010-038-10
 - b. EP 650: 010-034-10
 - c. EP 1100: 010-037-10
 - d. EP 2200-T:
 - i. w/o Embedded Communications
Card: 010-022-10



Multilink[®]

The logo for Wolf P, featuring the word "WOLF" in a bold, sans-serif font followed by a stylized "P" symbol. The logo is positioned in the upper left corner of a dark grey triangular graphic that points to the right.

WOLF P

A blue horizontal banner with the text "Sourcing Made Simple" in white, sans-serif font. The banner is positioned below the Wolf P logo and extends across the width of the page.

Sourcing Made Simple

Transfer Switches

STOCK ID	DESCRIPTION	DIMENSIONS	AC OUTPUT	AC INPUT	MOUNTING
<p>Safety Automatic Transfer Switch: The Safety Automatic Transfer Switch has an operating temperature of -37°C to +74°C (-34°F to 165°F) and provides automatic power source selection, generator capabilities and alarm reporting via dry contact relays. It includes a maintenance bypass switch.</p>					
010-505-10	Safety Automatic Transfer Switch, EDP Series – This Safety Automatic Transfer Switch pairs with the EDP double conversion series of UPS systems.	3.5"H x 19"W x 10"D	AC Outlet Capacity: 6A MAX Voltage Waveform: Sine Wave Output Power Connection: Hard-Wired to Terminal Blocks Phases: Single Phase 3-Wire Load Power Factor: 0.7 - 1.0 Voltage: 120V Nominal Over Current Protection: Internal Fuses Voltage Regulation:		

WOLF P

Sourcing Made Simple



WOLF P

Sourcing Made Simple

The Compact BBS Cabinet





Multilink[®]



Traffic Control Cabinets

STOCK ID	DESCRIPTION	DIMENSIONS	MATERIAL	POWER HEATING/COOLING	CABLE ENTRY	MOUNTING
BBS Cabinet						
030-529-10	Compact BBS Cabinet	48"H x 16.5"W x 17.31"D	Main Body: 1/8" Aluminum w/ Synthetic Rubber Seal Hardware: Stainless Steel	Power: N/A Heating/Cooling:		

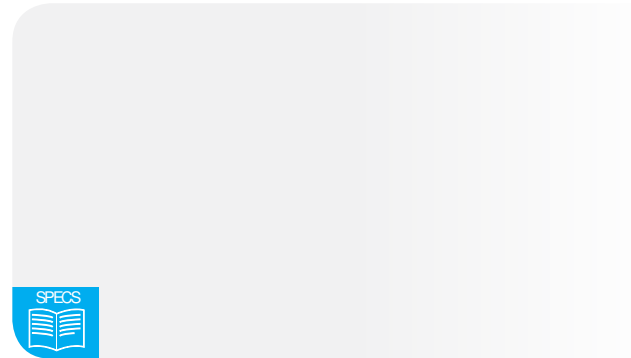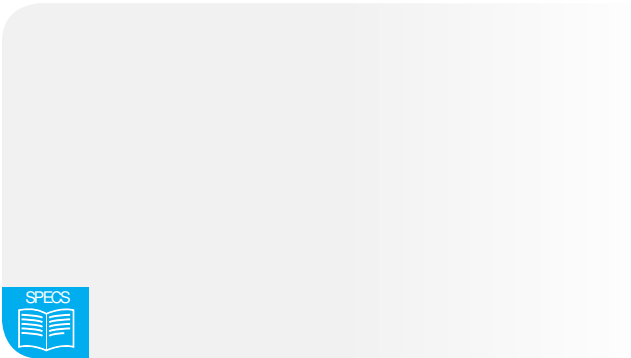

WOLF PA





WOLF PA





FREE Battery Shipping within
a 250 mile radius of our many
distribution locations!

WOLF PA 



Multilink[®]

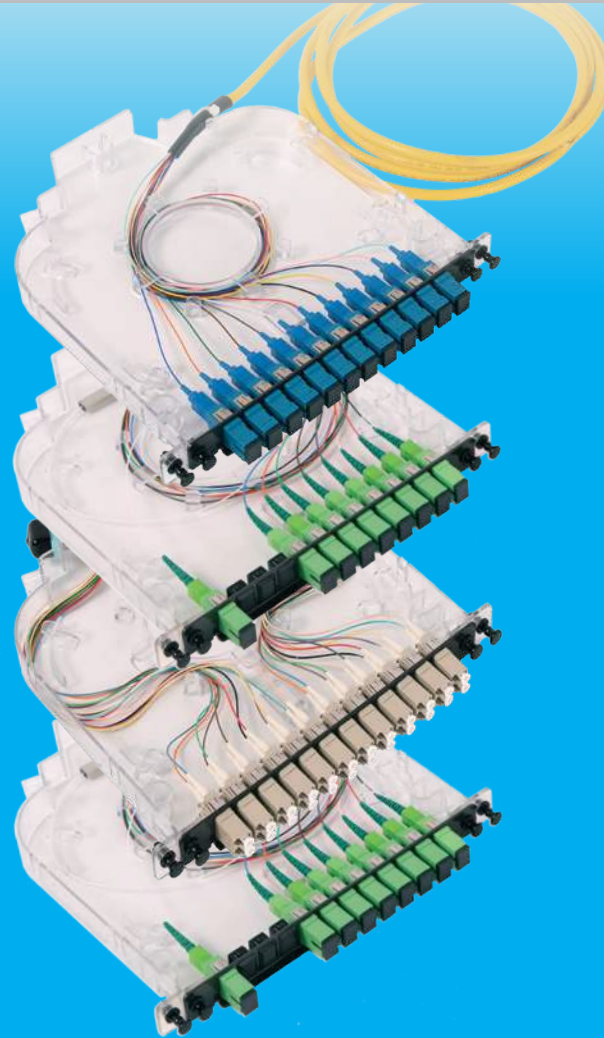

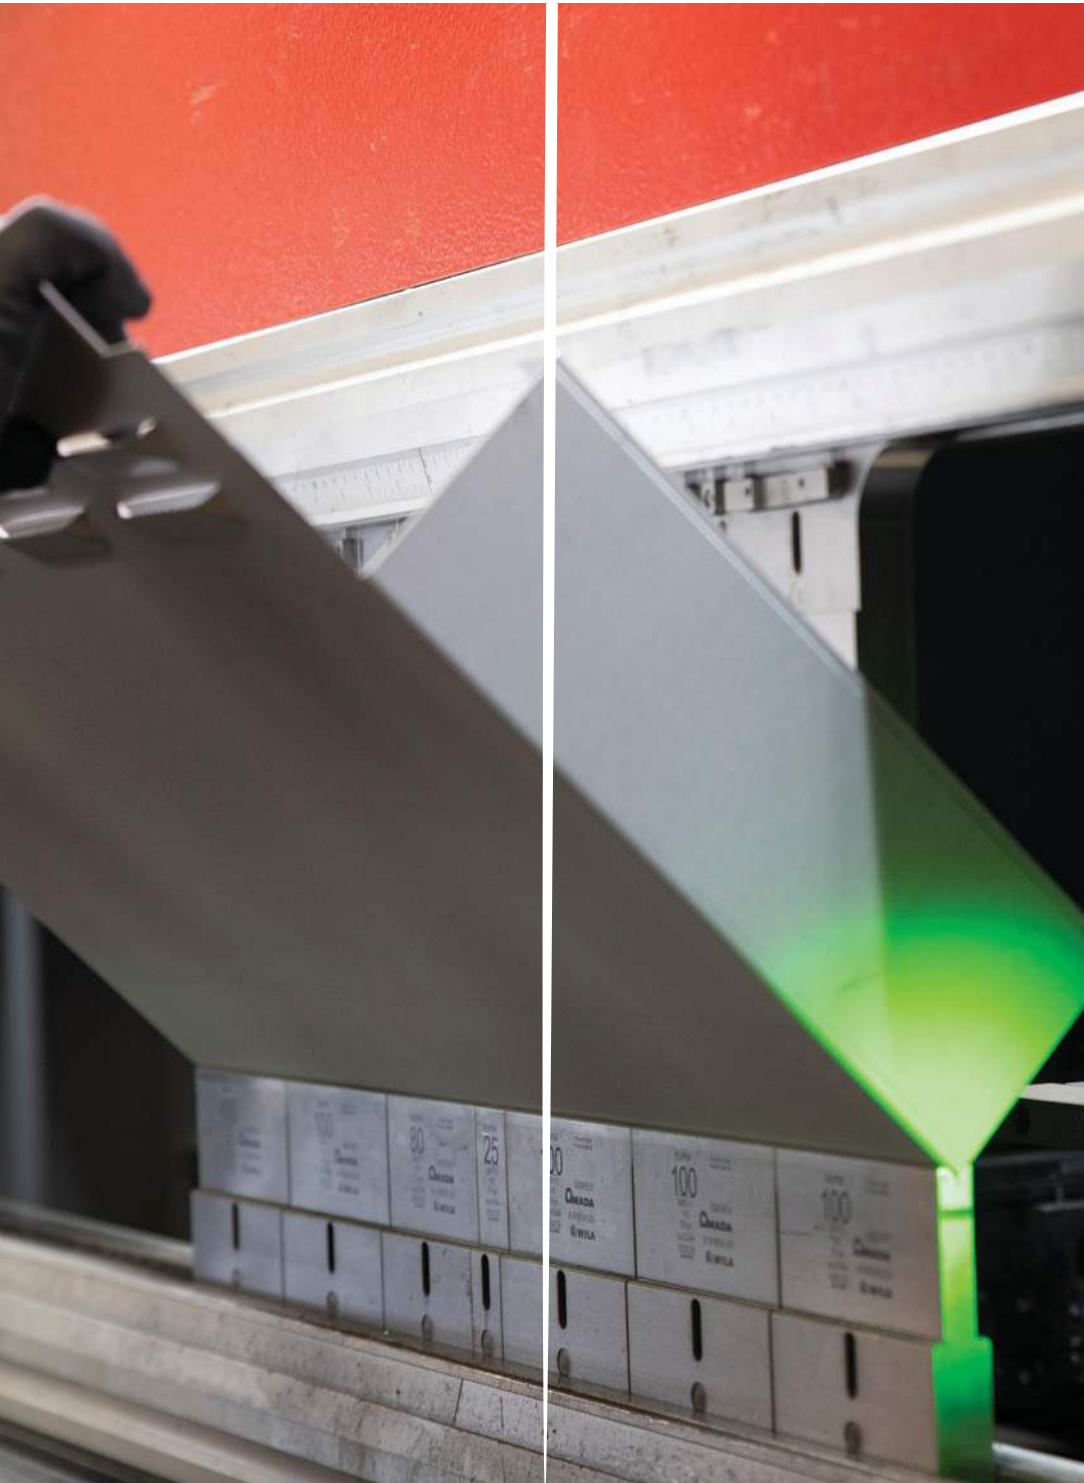





Visit GoMultilink.com or call 440-366-6966 for expert solutions to your specific network needs.